

## Evolution Not Revolution

The Just Add Power 2GΩ/3G Transmitter combines the enhanced audio and feature-set of the 3G system with the **maximum 1080p resolution** of 2G devices.

2GΩ/3G devices can be installed in 2G and 3G systems.

In 2G systems, a 2GΩ/3G Transmitter is a direct replacement to a 2G Transmitter and functions just like a 2G device.

In 3G systems, 2GΩ/3G Transmitters provide a lower-cost solution for sources that output **1080p resolution or lower**.



**Build a future-proof infrastructure.** Just Add Power 2GΩ/3G integrates seamlessly with both 2G and 3G. Build a 2GΩ system with 4K expansion plans, or mix-and-match with 2GΩ on 1080p sources and 3G on 4K sources!



Features	
Maximum 1080p video with HDCP 1.4	
All lossless audio supported – including Dolby Atmos®	
Control endpoints with RS232 & IR	
Image Play – Push, Pull & Pop	
Integrated Scalar on Receiver	

<b>Compliance</b>	HDCP 1.4 & RoHS/FCC/CE
<b>Operating Temp</b>	0-60 °C / 32-140 °F
<b>Supported Resolutions</b>	Up to 1920x1200 (interlaced & progressive)
<b>Dimensions &amp; Weight</b>	121 x 30 x 125 mm 5.0" x 1.2" x 4.9" 0.27 kg / 0.6 lb
<b>Ports</b>	Gigabit Ethernet HDMI In 3.5mm RS232 w/ null modem
<b>Bandwidth</b>	180-500 Mbps
<b>Power Supply (not included)</b>	~4.7 – 23V 5.5mm/2.1mm, Positive tip
<b>PoE</b>	10 watts maximum




**ETHERNET**

**HDMI IN**

**RS232**


All measurements in millimeters (mm)

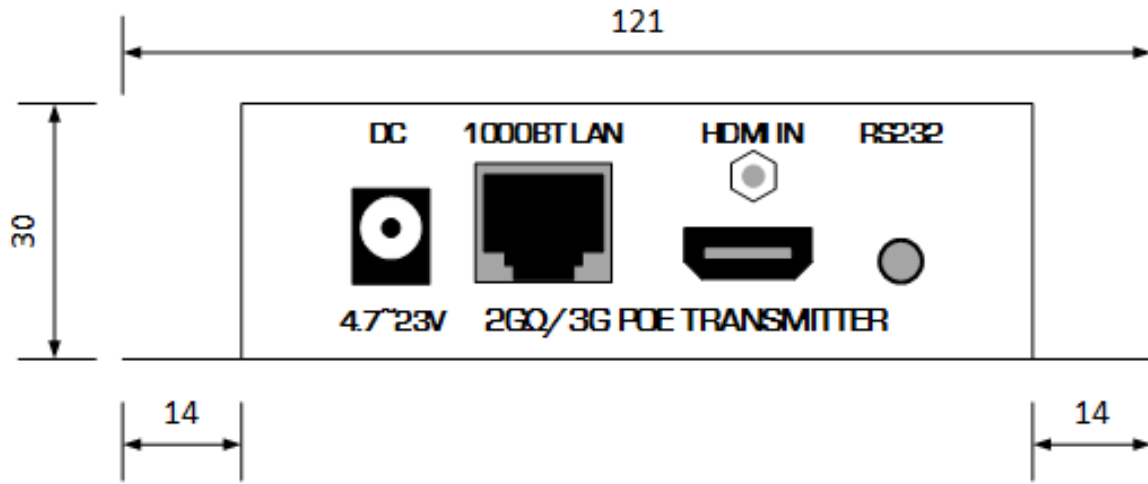

Gigabit POE Transmitter (up to 1080p)

2GΩ/3G ● ●  
DATA ⏻

705PoE Front/Back

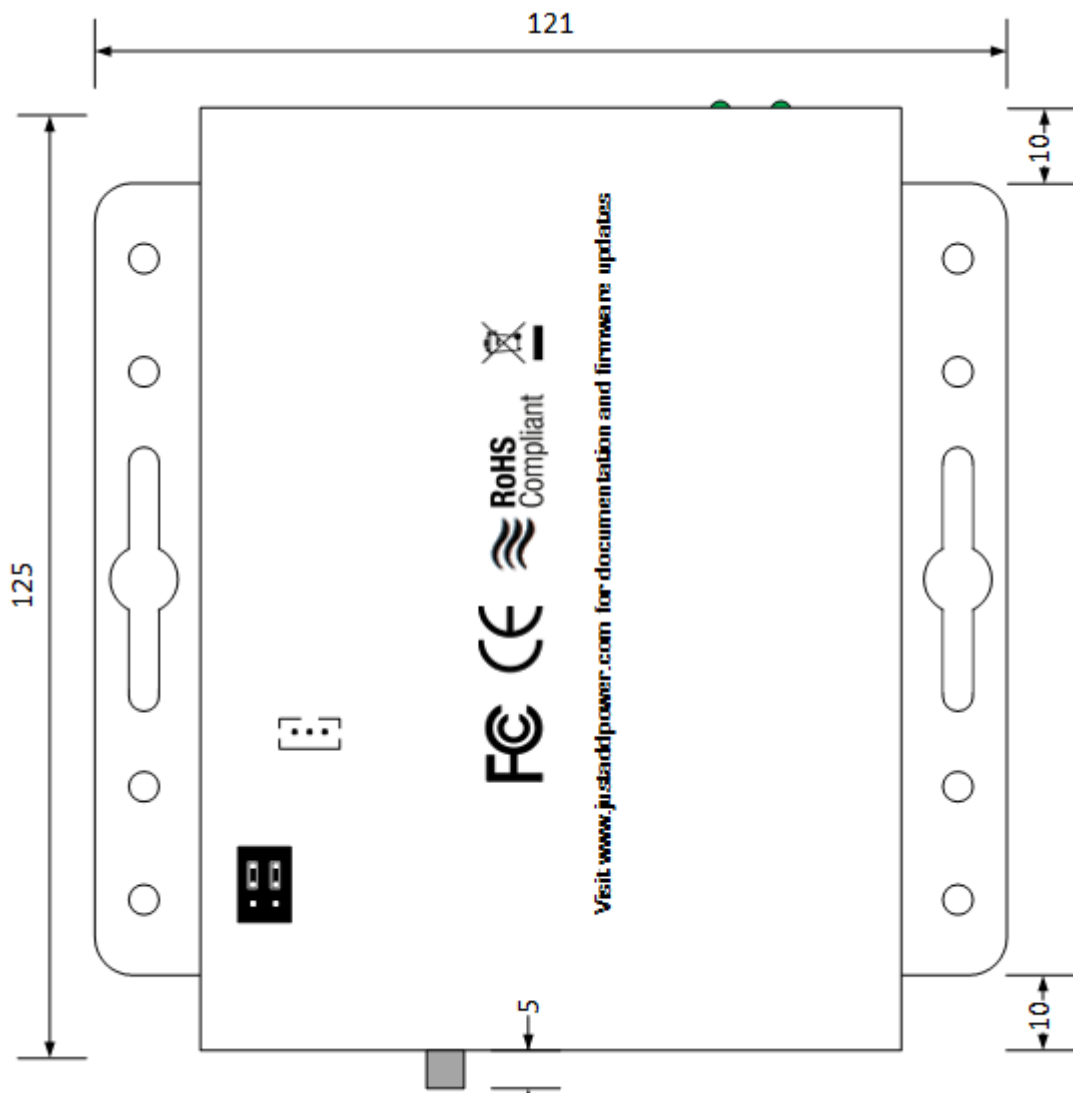

705PoE Bottom