



## OIP-N60D

### AV over IP and NDI HX 4K Decoder



OIP-N60D is a low latency 4K video over IP decoder. The device can receive IP streams from a number of sources including encoders, IP cameras and playout servers. OIP-N60D supports multiple streaming standards including NDI HX3. Users can select and switch between IP sources using the web UI, and output video via HDMI and USB.

### Key Features

- Supports RTSP, SRT, NDI HX3, NDI HX2, HLS, MPEG-TS
- Delivers high video quality with ultra-low latency
- Long-distance 4K IP-based AV transmission
- USB Extension over IP
- Instant source switching



### NDI HX3 & IP Decoding

4K and HD NDI HX3 and IP video streams can be decoded in high quality to HDMI with minimal latency.



### IP Video to USB Conversion

OIP-N60D decodes IP video streams from NDI HX and RTSP to UVC/UAC-compliant USB for use with video conferencing platforms. The device also supports NDI Virtual USB output.



### USB Webcam Extension

OIP-N60D transmits webcams over your IP network for quick and easy AV integration. The signal is decoded by the OIP-N40E for output to USB.



Video Wall Deployment

### Video Wall Deployment



The OIP-N60D decoder is an ideal building block for video walls, supporting monitors mounted in landscape or portrait mode. Combine multiple decoders and screens to build the wall configuration you need.

# Product Specifications



Interface	
HDMI Output	HDMI 2.0 x1
USB Device	Type-C x1
USB Host	Type-A x1 (Support USB webcam)
Audio Input	Line In/MIC In ,3.5mm x1
Audio Output	Line Out, 3.5mm x1
Ethernet	GbE LAN (RJ-45) x1
Menu Button	Yes
Reset Pin	Yes
LED Indicator	Power light Status Connection light
Network	
Decoding capability	Up to 2160p60
IP Protocol	NDI HX3 / NDI HX2 / SRT / HLS / MPEG-TS over UDP / RTSP
Video Decoding	H.264 / HEVC
Video Decrypt	AES 256
Audio Decoding	Yes
IEEE 802.1X	Yes
PoE	PoE (IEEE802.3af)
Functions	
Management	OSD / Web
USB Webcam Extension	Yes
IP Stream to USB webcam	Yes
UVC	Yes
UAC	Yes
Video Wall	max : 3x3
Image Rotation	0 / 90 / 180 / 270
General	
Power	PoE / USB
Power consumption	PoE : 11 W USB : 10 W
Operating Temperature	0°C ~ 40°C
Operating Humidity	20~80%, non-condensing
Storage Temperature	-20°C ~ 60°C
Weight	0.77lbs (350g)
Dimensions (W×H×D)	Case Only: 4.92" x 3.5" x 0.98" (125 x 89 x 25 mm)

## I/O Connections

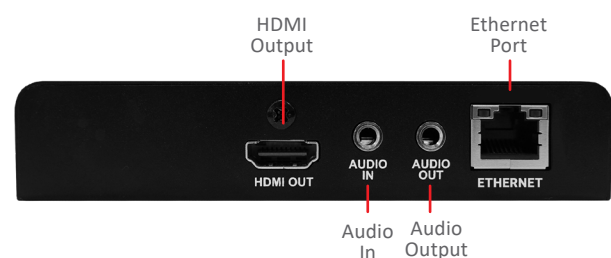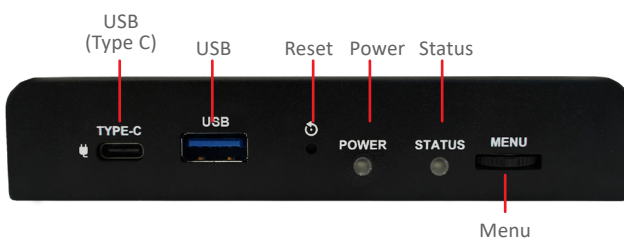

**Lumens**<sup>®</sup>

Lumens Integration, Inc.  
4116 Clipper Court  
Fremont, CA, 94538  
Phone: +1-866-600-0988  
Fax: +1-510-252-1389

Lumens Europe  
De Nayerstraat 17 9470  
Denderleeuw Belgium  
Phone : +32-473-58-38-95  
Fax : +32-2-452-76-00



www.MyLumens.com