3G ULTRA 717 Wallplate Transmitter



VBS-HDIP-717WP2

HDMI, VGA, and All Lossless Audio Supported



to 10 fps



The 3G Ultra 717WP2 Wallplate Transmitter fits into a 2-gang construction box and provides HMDI, VGA, and line audio inputs to any Just Add Power video distribution system.

Including all of the 4K system wide features found within the 3G Ultra Transmitters, this device can be paired with any 3G Ultra and or 2G Omega models to distribute any source to any zone.


Features

Audio	All lossless audio supported	KVM Support	Provide local and remote access to all computers on the system	
Colors	Stereo Audio Input Black, White or Custom		with a built-in keyboard, mouse and touchscreen interface at both ends of a connection	
HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	Scalability	Fully compatible with all 3G Ultra and 2G Omega products	
lmage Pull	Preview an image from any source or display,in any web browser or control system, at up			

3G ULTRA 717 Wallplate Transmitter


VBS-HDIP-717WP2

Front of Device:

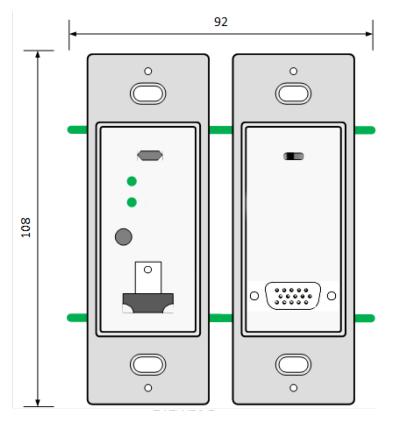

All measurements in millimeters (mm)

Side of Device:

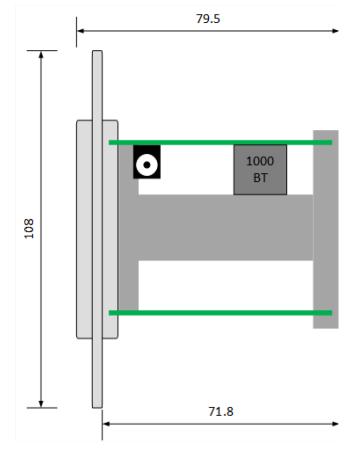

Specifications

Operating Temp

0-60 °C / 32-140 °F

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI In VGA In
Dimensions & Weight	108 x 92 x 79.5 mm 4.3" x 3.6" x 3.1" inch 0.09kg / 0.2 lb		3.5mm Line-in Micro-USB 2.0 5.5mm/2.1mm barrel
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, Positive tip